




CLP // Size 1020

Preliminary version

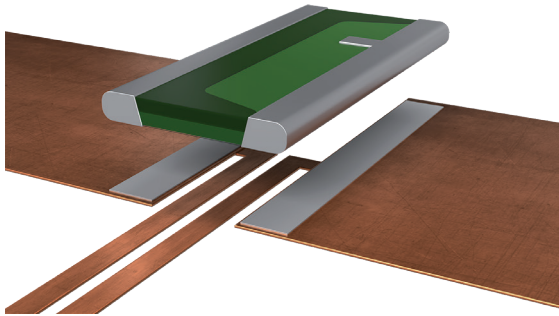

Features

- 2 W power rating at 130 °C
- Constant current up to 26 A (3 mOhm)
- Excellent long-term stability
- High pulse power rating
- Mounting: Reflow- and IR-soldering
- RoHS 2011/65/EU compliant
- AEC-Q200 qualification in process



Applications

- Current sensor for power hybrid applications
- Control systems for the automotive market
- Power modules
- Frequency converters
- Switch mode power supplies


Technical data

Resistance values	mOhm	3 / 5 / 10 *
Tolerance	%	1 / 5
Temperature coefficient (20-60 °C)	ppm/K	<50
Applicable temperature range	°C	-65 to +170
Power rating P_{130°C}	W	2
Power rating P_{70°C}	W	5
Internal heat resistance (R_{thi})	K/W	<20
Dielectric withstanding voltage	V AC/DC	200
Inductance	nH	<1
Stability (at rated power) deviation after 2000h, T_K = Terminal temperature	%	<0.5 ($T_K=100^\circ\text{C}$) <0.7 ($T_K=130^\circ\text{C}$)

*See all standard values and tolerances on page 2

Ordering code

CLP - R003 - 1.0

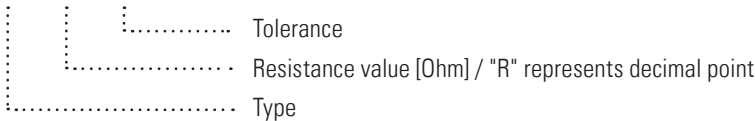

Information

	R003 / R005	R010
D-Samples	available in July 2024	available in December 2024
AEC-Q200 qualification	available in July 2024	available in December 2024



CLP // Size 1020


Recommended solder profile

Reflow- and IR-soldering

Temperature	°C	260	255	217
Time	sec	peak	40	90

Tape and reel information

Specification	DIN EN 60286-3		
Tape width	mm	12	
Reel size	inch	13	
Parts per reel	pcs	10000	
Packaging weight	g	481	
Tape material	plastic		

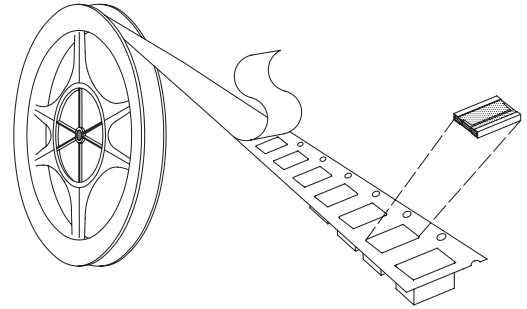


Available standard resistance values and tolerances*

Resistance values	Tolerance	
	1.0	5.0
R003	✓	✓
R005	✓	✓
R010	✓	✓


* Further values and tolerances on request

✓ = available

Temperature dependence of the electrical resistance

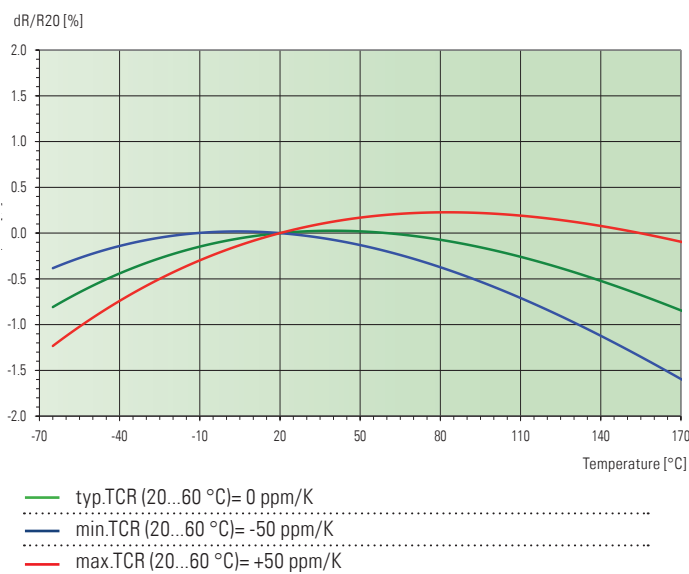


Power derating curve

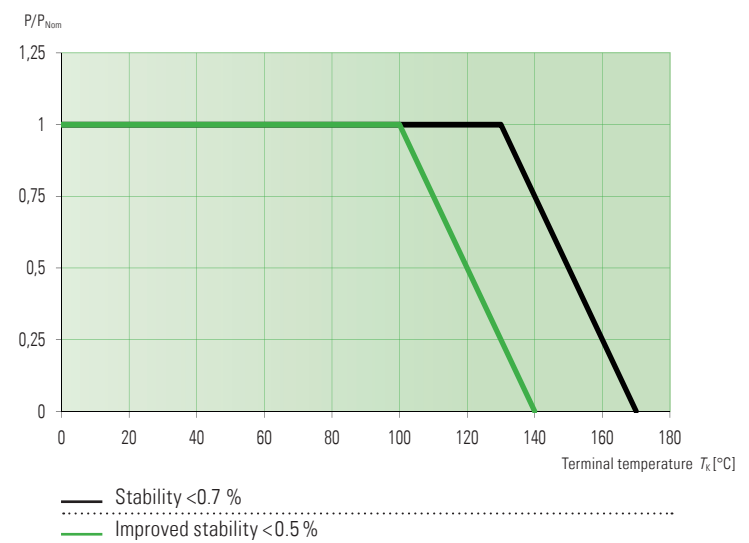



CLP // Size 1020

Mechanical dimensions and pcb-layout proposal (Reflow-soldering) [mm]

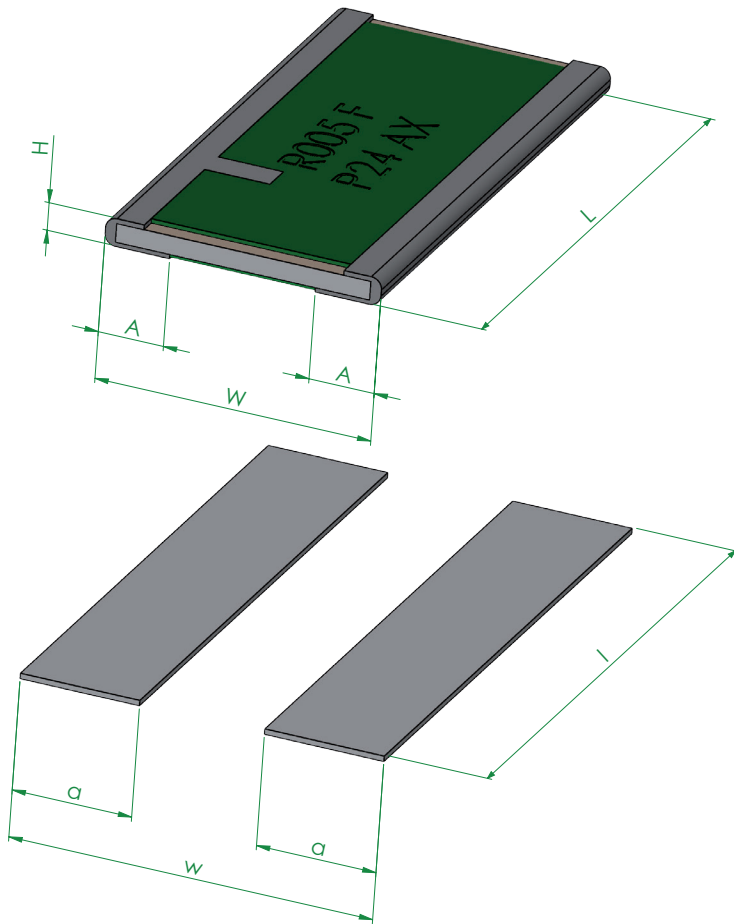


type:	L	W	H	A
CLP	5.08 ±0.3	2.54 ±0.2	0.35 +0.2/-0.1	0.6 ±0.2

solder pad type:	l	w	a
CLP	5.5	3.35	1.1



CLP // Size 1020

Maximum pulse energy respectively pulse power for permanent operation

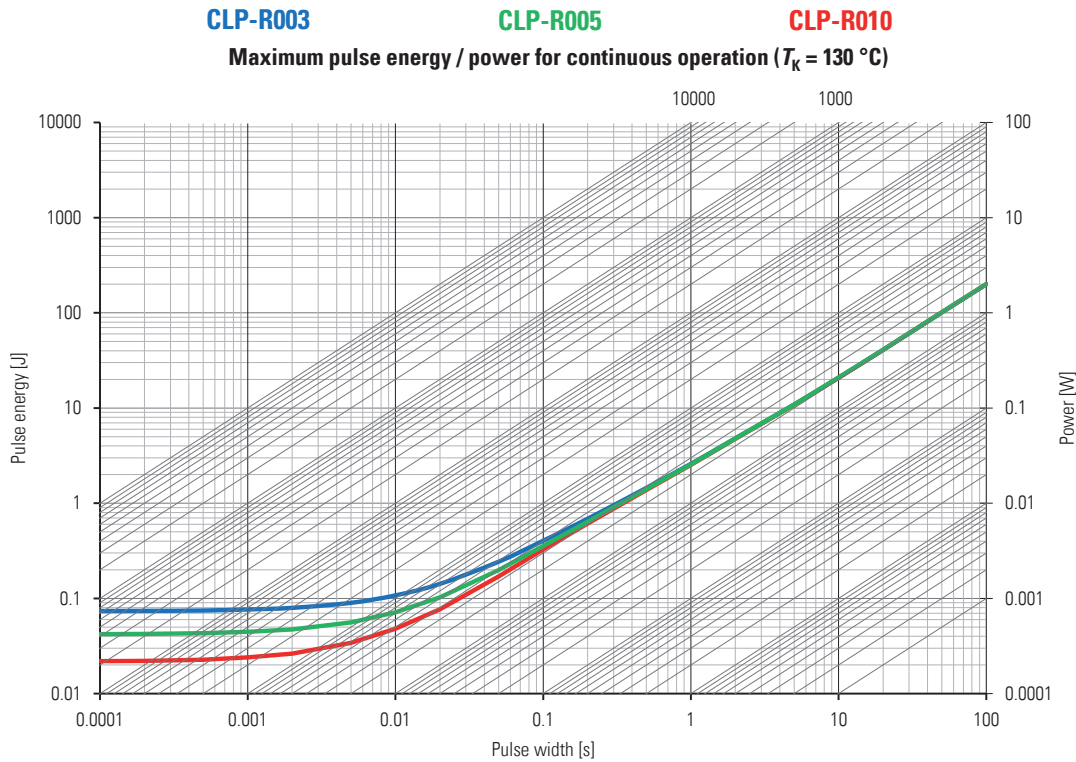

Specification

Parameters	Test conditions	Specified values
Temperature Cycling	2000 cycles (-55 °C to +150 °C)	±0.7%
Low Temperature Storage and Operation	-65 °C for 250 h	±0.1%
Resistance to Soldering Heat	260 °C for 10 sec / 8h steam aging	±0.1%
Moisture Resistance	MIL-STD-202 method 106	±0.5%
Mechanical Shock	100 g, 6 ms half sine	±0.2%
Vibration, High Frequency	10 g, 10-2000 Hz, 24 h each axis	±0.2%
Operational Life	2000 h, $T_k = 130$ °C max at rated power	±0.7%
High Temperature Exposure	2000 h / 170 °C	±0.7%
Bias Humidity	+85 °C, 85 r.F., 1000 h	±0.7%

Disclaimer // All products, product specifications and data are subject to change without notice.

The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale. Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended. No license, express or implied, or otherwise, to any intellectual property rights is granted by this document. Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.

